


3/4 - 14 THREAD

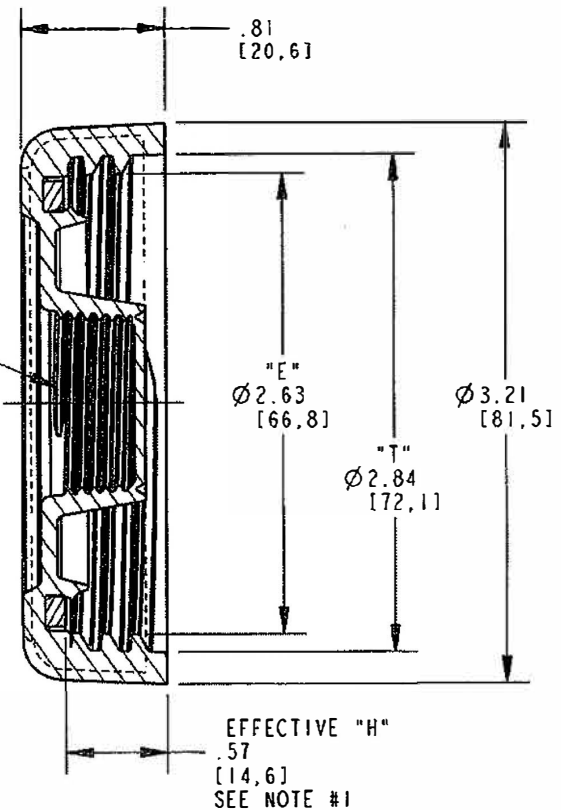

SECTION A-A

PRO/E

NOTES:

- 1) EFFECTIVE "H" IS ESTABLISHED BY SUBTRACTING GASKET THICKNESS FROM OVERALL "H"
- 2) MATERIALS USED MEET FDA REQUIREMENTS
- 3) 6TPI, .167 PITCH

CUSTOMER DRAWING

BREAK ALL SHARP EDGES WITH 1/64" RADIUS, UNLESS OTHERWISE SPECIFIED		DATE	DRAWN BY
THE FOLLOWING TOLERANCES APPLY UNLESS OTHERWISE SPECIFIED:		09-APR-02	VLV
ANGLES	±1/4"	SCALE	CHECKED
HUNDREDTH	±.02 [0.50]	1.0	TPK
THOUSANDTH	±.010 [0.25]		APPROVED

INITIAL RELEASE	09-APR-02	VLV
CHANGE NUMBER	CHANGE	DATE
BY		

TITLE		CLOSURE, 70mm, 6TPI BUTTRESS WITH 3/4" REDUCER	
PRODUCT		SC-76R	
DRAWING NUMBER		28001776	
MFG LOCATION		DETAIL NUMBER	
TEMPER		SC-76R	

